

Date 3/24/2015

Station 2000A

INSTALL SHEET (Q330 Surface Site with Wilan Telemetry)

Local Date/Time: 2:40 PM

GMT Date/Time: _____

Field Team: Tanner, Pat, Victor

GPS Location of Site: _____

Equipment


Sensor S/N:	<u>109807</u>	Sensor Type:	<u>STS-2</u>
Q330 DAS S/N:	<u>010000A1B9B8B2E</u>	Q330 TAG ID BOB S/N:	<u>974</u>
Q330 IP Modem S/N:	<u>204.114.29.52</u>	Baler tag:	<u>05260</u>
Clock S/N:	_____	Modem IP:	_____
Flash Disk 1 S/N:	_____	Size: GPS transceiver:	<u>DYSA10118</u>
Flash Disk 2 S/N:	_____	Size: Switch label:	<u>2000 SW 2</u>

INSTALL SENSOR

Record the declination of your compass _____ degrees W / E (circle one)

Place an arrow on the figure below showing where the declination marks is position on this compass (cross check against above to avoid sign errors)

aligned using map of 2000-level

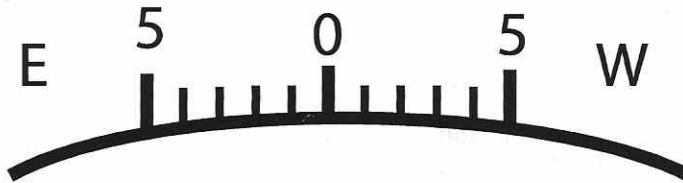

N/A

Guralp 3T

- Add layers of landscaping timber to provide clearance for this larger sensor
- Sweep any dirt from the top of the concrete base
- Attach the alignment jig and use it to simultaneously level and orient the sensor
- Lock feet of sensor
- Connect the sensor cable to the sensor and then to the DAS (leave enough slack to allow you to reattach the alignment jig)
- Reattach the alignment jig and fill out the alignment table below (4 measurements). If initial orientation is off by more than 1 degree align and relevel before making final measurements.

Trillium or STS2

- Sweep any dirt from the top of the concrete pad
- Use a ruler and sharpie to scribe an alignment line on the concrete base for this sensor
- Connect the sensor cable to control box and sensor
- Align the sensor using the mark and the alignment rod, level, repeat until level and aligned (fill out table below)

ALL SENSORS

N/A

- Cut a length of 2" fire hose to run from sensor vault to DAS enclosure
- Use a fish tape to pull the DAS to control box cable through the fire hose and connect both ends
- Unlock masses
- Center masses
- Working with your partner verify the sensor is functional with a stomp test

N/A

- Install vault cover with screws
- Cover vault with at least 2 layers of black plastic
- Bury sensor using sandbags filled with dirt, mound dirt on top of vault cover, and add mulch to top

Use Brunton compass adjacent to sensor measurement jig, measuring North (N) and South (S). Reverse the jig and repeat recording the 4 measurements below. Record to your best guess of the nearest 0.1 degree. If orientation is more than 1 degree away from NS try to realign. For Trillium and STS2 sensors use left and right side of alignment rod

Brunton Left (N)	Brunton Left (S)	Brunton Right (N)	Brunton Right (S)

Q330 Hardware Setup

- N/A {
- Install solar panels on post using brackets and wood screws.
 - Reconfigure guy wires if necessary
 - Place the dog house near the solar panel pole with the door facing downhill to allow water to drain
 - Install GPS on top of pole (must see the sky)
 - Install Wilan radio on the pole (make sure the antenna is on the side facing Yates)
 - Run GPS and network cables and connect to Q330 (do not bundle up until testing is finished)
 - Connect the baler to the Q330

Power system tests:

Initial battery voltage (V) N/A

Solar panel output test:

Sun condition when tested (circle one): (a) sun on panels, (b) cloudy, (c) sun on panels at low angle

Panel 1 output (V) N/A

Panel 2 output (V) N/A

Equipment power up:

- N/A {
- Make sure power box is set for sealed battery mode
 - Plug battery into power box. Record voltage showing on LCD display (V) _____
 - Connect both solar panels to power box. Record voltage on display (V) _____
 - If all looks ok, connect the Q330 to power (Note with Guralp unlock cannot happen till now)
 - Check here when the GPS LED goes yellow

Q330 Operations with the Clie (program Q330B147 on the SONY Clie PDA)

Clone the program into the Q330

Commands->Cloning

```

>Select file to clone based on sensor type
>Station names
    >Palm overrides 330
    >"Check" Edit/Verify
>IP Addresses
    >Palm overrides 330
    >"Un-Check" Edit/Verify
!Send
    >Station Names
        >DP4 >New
            !Enter current station name (All CAPS and up to 5 letter/number characters)
            !Ok
!Save/Reboot
!Ok
    
```

Views ->Data Recording ->DP4 *Station name A2000 (SENSOR TYPE)

Note: DP3 station name should correspond to sensor type.

Views ->Data Recording ->DP4 *Station A2000 (STATION NAME) *Net Xb (NETWORK CODE)

Connect sensor to Q330 AFTER Cloning the Q330 for correct sensor type

↓
Baler

Date 3/24/2015

Station 2000A

SENSOR Unlock Procedure

CMG-3T: Attach extra power to 3T BOB. Use the BOB to test if the sensor is locked. Press and hold both the Lock and Enable Buttons for about 10 seconds. Watch the LED light (4-6 blinks in ~3 sec = Locked: indicates OK to use.)

Next, unlock the sensor. Press and hold both the Unlock and Enable Buttons for about 10 seconds. Release buttons when the LED light illuminates (2 blinks and solid red indicates unlocking.)

TURN OVER

STS-2: Use an STS-2 screwdriver to smoothly unlock all 3 elements. Give the STS-2 and initial centering pulse using the button on the host box.

Views > Sensor: !Center A (STS-2)

Views->System: *Main Current: 57mA *Input Volts: 12.15V (>12.5 full sun, >11.5 no sun)

*Ant. Current: N/A *Temp: 19°C

*Q330 SW Vers: L146 *Last Boot: 20:44 3/24/15 *Last Resync: 20:46 3/24/15

Views -> Clock: *Last Lock: _____ *Phase error: _____
*Clock Quality: _____

Status ->GPS *GPS Time: _____ *GPS Date: _____ (given in DD/MM/YYYY)
*Height: _____ *Latitude: _____ *Longitude: _____

Views ->Sensors !Refresh *Boom Positions (within +/-15, i.e. within +/-1.5 volts)

1 13 2 8 3 2

** If the Boom Positions are out – recenter sensor: Views ->Sensors !Center A

Views ->Quickview ->chan 1,2,3 -> !Start Stomp test:

- ch 1: OK
- ch 2: OK
- ch 3: OK (stomp seen?) -> !Stop

Write values:
ch 1: max _____ min _____ RMS _____
ch 2: max _____ min _____ RMS _____
ch 3 max _____ min _____ RMS _____
(Values should be ~10,000 counts)

Status ->Data Port Txfr ->Data4 *Packet buffer used (increasing?) YES NO

Commands ->Baler Cmds Turn on baler power control
 !Send Baler Command (Baler should turn on) Do NOT use ATTN button to power baler
Note: If the baler times out BEFORE finishing REPEAT

Status ->Data Port Txfr ->Data4 *Packet Buffer (Decreases to zero) YES NO
*Data packets sent 1507

NOTE: If the Q330 does not transfer data to the Baler try clearing the Baler “association” by holding in the baler Attention button in until the light turns solid red (~5 sec). Release the button and then, after the light begins to flash green, press the Attention button once to shut down the Baler. Repeat the process once more and then try to transfer data to the Baler.

Status->General*Total ReSyncs 154

Views ->Sensor: *Boom Positions (less than +/-15, i.e. less than +/-1.5 volts)

1 13 2 8 3 2

App ->Make Docfile !OK to default filename Conf-YrMoDy-Q330 _____

SITE NOTES (Anything strange or notable)

Checklist

Paperwork

Completed pages 1-3

Sensor

N/A Compass declination set and recorded

Oriented

Level

Feet locked

Power system

Battery terminals tight

All power box connection tight

Any external power cables to box secured from rodent damage

Cables in the air have drip lines

No cables are on the ground without protection

N/A SOLAR: panel boxes closed

AC: battery minder plugged in powered

Q330

Completed paperwork on pages 1-2

Acquiring data

All unused connectors capped

Site

- N/A {
- Multiple layers of plastic on top of vault
 - Plastic configured to not collect water around sensor vault
 - Vault well covered with sandbags and dirt (6 inches minimum)
 - Cables all secured
 - Dog house door is secured
 - Cable entry plugged with plumber's putty

Inventory

STS-2, 2x orange cable, breakout box

Q330 + bales + cables

GPS transceiver + cables + converter

Battery + battery tender

Small fub